



FIND IT! WITH SENSIT[®] GOLD

VERSATILE GAS DETECTION INSTRUMENTS
*Sensit[®] Gold is designed to provide personal protection
from potentially hazardous conditions and help
find the source of combustible gases fast!*



Sensit[®] Gold Features

- Highly Sensitive Leak Detection
- Display up to 4 gases
 - ▶ LEL (Optional PPM and % Volume)
 - ▶ Oxygen
 - ▶ Carbon Monoxide
 - ▶ Hydrogen Sulfide
- Internal Pump
- Infrared Downloading
- Lowest Cost, Long Life Sensors
- LED Warning Lights
- Bright LCD Display
- Optional Air Free CO Test



Sensit[®] Gold Instruments, simply the best value!

FIND IT! WITH SENSIT® GOLD

Whether you need an investigation tool or a confined space monitor - you can depend on the Sensit® Gold to provide the safety and accuracy you need.

STANDARD FEATURES

- Internal Pump
- Water/Dust Filter
- Push Button Operation
- Field Calibration
- Date/Time Display
- Calibration Alert
- Operation Memory
- Calibration Memory
- Infrared Download
- Audible/Visual Alarms
- Backlit LCD
- Hard Carrying Case
- Programmable Auto Shut Off

SENSING FEATURES


SENSIT® GOLD INSTRUMENTS	LEL ALARMS	LEL DISPLAY	100% GAS	LEAK DETECTION	CARBON MONOXIDE	OXYGEN	HYDROGEN SULFIDE
SENSIT EX SG00500-A	●	●		●			
SENSIT EX-CO SG00500-B	●	●		●	●		
SENSIT EX Plus SG00500-C	●	●		●		●	
SENSIT EX-CO Plus SG00500-E	●	●		●	●	●	
SENSIT EX-TOX SG00500-D	●	●		●			●
SENSIT EX-TOX Plus SG00500-G	●	●		●		●	●
SENSIT 4GAS SG00500-H	●	●		●	●	●	●
SENSIT GOLD 100 SG00900	●	●	●	●	●	●	●

OPTIONS

- Recharger Kit
- Printer
- PC Interface
- Hot Air Probe
- Confined Space Kit
- Calibration Kit



Sensit® Gold instruments are Approved UL913, For Class 1, Division 1, Groups C and D Hazardous locations when used with alkaline batteries.

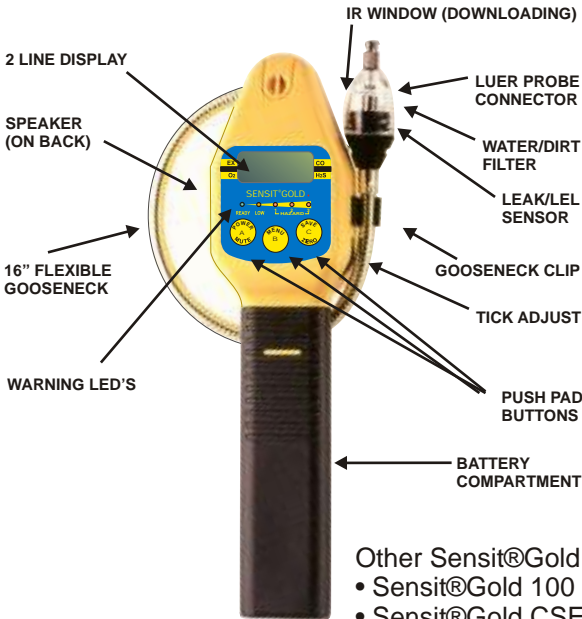

Other Sensit® Gold versions available:
 • Sensit® Gold 100 - 100% Gas Volume
 • Sensit® Gold CSE - Confined Space Monitor

SENSOR SPECIFICATIONS

TYPE	RESOLUTION	RANGE	ACCURACY
Leak	N/A	0 -50,000ppm	N/A
PPM	10ppm	0-2000ppm	N/A
LEL	0.1%	0-100%	±10%
%Gas	0.1%	5-100%	±5%
O ₂	0.1%	0-25%	±0.2% or 2%*
CO	1ppm	0-2000ppm	±5ppm or 5%*
H ₂ S	1ppm	0-100ppm	±1ppm or 5%*

PRODUCT SPECIFICATIONS

Size: 11.5" x 3" x 2.32" (29.2 x 7.6 x 6.9 cm)
 Weight: 1.2 Lbs. (0.5kg)
 Operational Temp: -20 to 120° F (-28.9° to 48.9°C)
 Storage Temp: -20 to 132° F (-28.9°C to 55.5°C)
 Battery Life: Alkaline: 16 Hrs. continuous

APPLICATIONS

- Gas Leak Survey/Investigations
- Confined Space Monitoring
- Gas Emergency Investigations
- Vessel Testing

USERS

- Utilities
- Maintenance
- Fire Departments
- Safety Inspectors
- Home Inspectors
- Water/Sewer Departments
- Heating Contractors
- Utility Contractors
- Industrial Plants
- Propane Marketers

FOR MORE INFORMATION

J And N Enterprises, Inc.
 851 Transport Drive
 Valparaiso, IN 46383-8432
 Phone: (888) 4SENSIT
 (473-6748)
 (219) 465-2700
 Fax: (219) 465-2701
 www.gasleaksensors.com



Distributed by _____